



NIDEC OKK CORPORATION

8-10, KITA-ITAMI, ITAMI
HYOGO 664-0831 JAPAN
International Sales Department
TEL:(81)72-771-1143
www.nidec.com/en/nidec-okk/
E-mail:nokk.ovsd@nidec.com

NIDEC OKK A DIVERSIFIED MANUFACTURER OF MACHINE TOOLS

Specializes In:

Machining centers
Graphite cutting machining centers
Grinding centers
CNC Milling machines
Conventional milling machines
Total die and mold making systems
Flexible manufacturing cells and systems

NOTE :

NIDEC OKK reserves the right to change the information contained in this brochure without notice.

NIDEC OKK is not responsible to make changes to previously sold machines or accessories.

The machines in the photographs of this brochure may include optional accessories.

The export of this product is subject to an authorization from the government of exporting country.
Check with the government agency for authorization.

NIDEC OKK USA CORPORATION
100 REGENCY DRIVE, GLENDALE HEIGHTS, IL 60139 USA
TEL:(1)630-924-9000
FAX:(1)630-924-9010

NIDEC OKK EUROPE GmbH
HANSEMANNSTR. 33 41468 NEUSS GERMANY
TEL:(49)2131-29868-0
FAX:(49)2131-29868-41

NIDEC OKK Machinery (THAILAND) Co., Ltd.
KUMTHORN HOLDING BUILDING 2nd FLOOR 897-897/1 Rama 3
Road, Bangpongpan, YANNAWA, BANGKOK 10120 THAILAND
TEL:(66)2-683-2160-2
FAX:(66)2-683-2163

NIDEC OKK (SHANGHAI) CO., LTD.
12F, TOWER B, 100 ZUNYI ROAD, CHANG NING DISTRICT,
SHANGHAI, CHINA
TEL:(86)21-62700930
FAX:(86)21-62700931



Vertical Machining Center

VM/R II SERIES

VM43R II

VM53R II

VM76R II

VM/R II SERIES



www.nidec.com/en/nidec-okk/

NIDEC OKK CORPORATION

VMR SERIES

VERTICAL MACHINING CENTER

High Rigidity Heavy Cutting

This vertical machining center continues our tradition of making highly rigid machines.

Wide column increases rigidity further !

Higher in accessibility and maintainability and easier to use than conventional machines.

Box guide way that is used traditionally provides excellent accuracy and rigidity.

The full range of stable machining is possible from common materials all the way to hard to cut materials like titanium.

Legendary Cutting



VM43R II

Travel distance
(X axis × Y axis × Z axis) **630 × 430 × 460mm**
(24.80" × 16.93" × 18.11")
Table size (X axis × Y axis) **800 × 420mm** (31.50" × 16.54")
Spindle motor output
(Short-term/
Continuous ratings) **11/7.5kW** (15/10HP)
(No.40 MITSUBISHI/FANUC)
15/11kW (20/15HP) (No.40 FAI)
15/11kW (20/15HP) (No.50)



VM53R II

Travel distance
(X axis × Y axis × Z axis) **1050 × 530 × 510mm**
(41.34" × 20.87" × 20.08")
Table size (X axis × Y axis) **1050 × 560mm**
(41.34" × 22.05")
Spindle motor output
(Short-term/
Continuous ratings) **11/7.5kW** (15/10HP) (No.40)
18.5/15kW (25/20HP) (No.50)




VM76R II

Travel distance
(X axis × Y axis × Z axis) **1540 × 760 × 660mm**
(60.63" × 29.92" × 25.98")
Table size
(X axis × Y axis) **1550 × 760mm**
(61.02" × 29.92")
Spindle motor output
(Short-term/
Continuous ratings) **37/18.5kW** (50/25HP) (No.40 FANUC)
37/22kW (50/30HP) (No.40 MITSUBISHI)
18.5/15kW (25/20HP) (No.50)

Increased rigidity as a result of review of the casting structure!

Tapered column base and increased base width provide higher rigidity. (VM43R II:130%, VM53R II/VM76R II:150% of conventional column width)

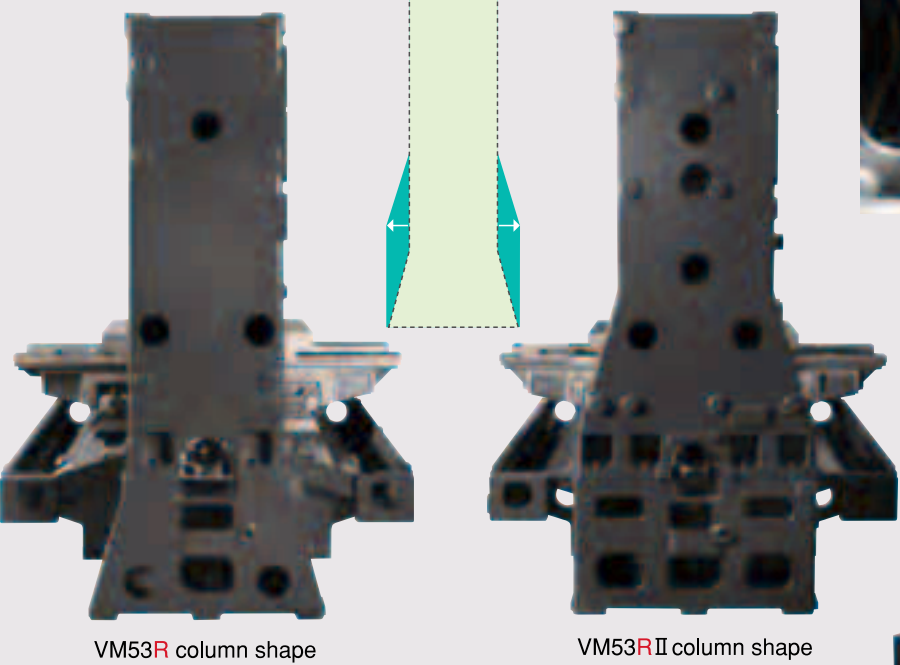

Increased rigidity of main body

High rigidity of the machines has become available by combining the wide column structure with the optimum design obtained from the analysis on the diagonal rib.




The photo shows VM43R II.



The photo shows VM53R II.


High maintainability

For improving the work efficiency, the equipment that need daily checkup are arranged in one go on the maintenance panel on the rear face. The work space for chip discharge is larger than conventional machines as a result of optimizing the position of the oil cooler.

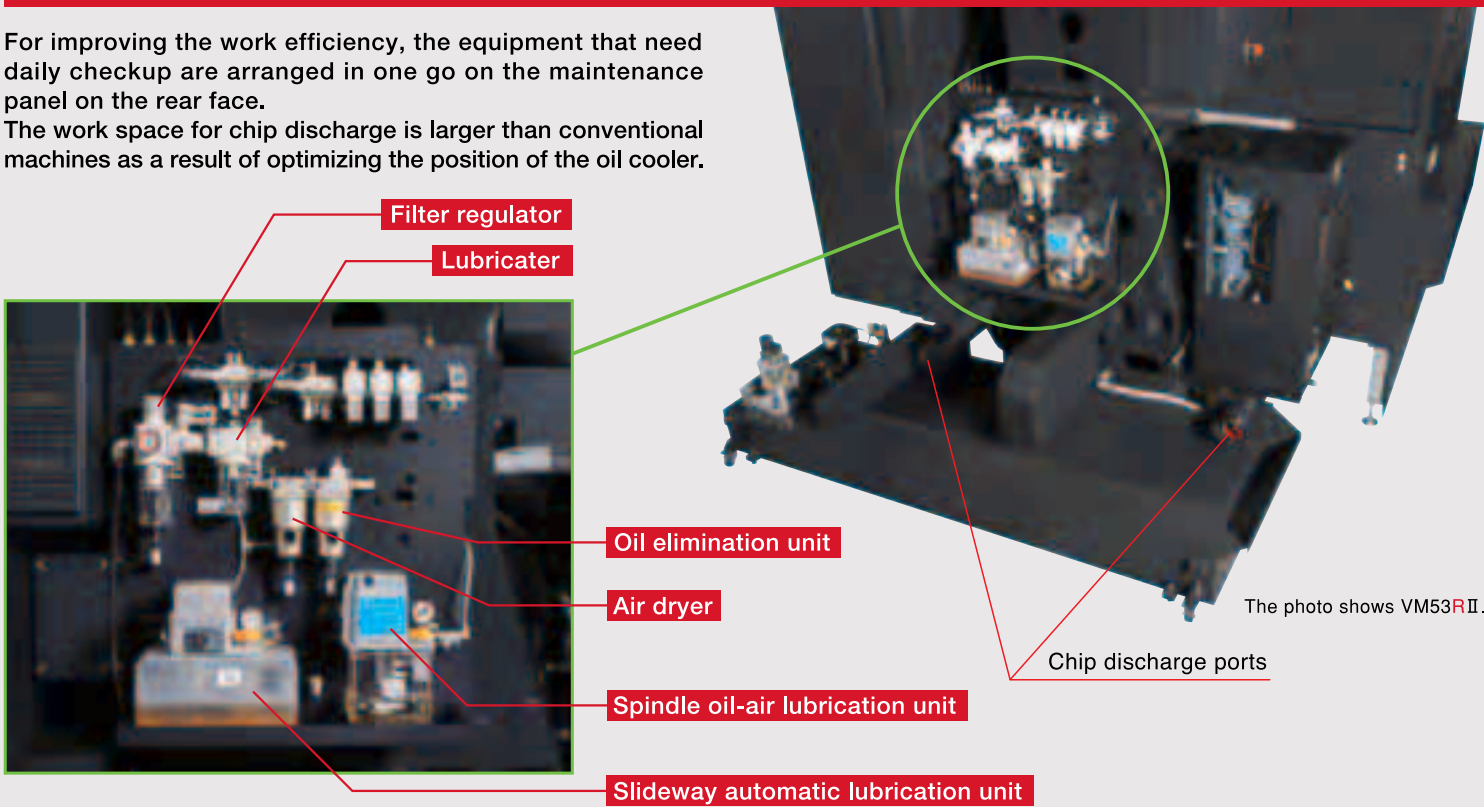

High accessibility and operability

Accessibility is greatly improved and higher operability is available due to 770-mm (30.31") distance to the spindle from the cover front face and 225-mm (8.86") distance to the table.

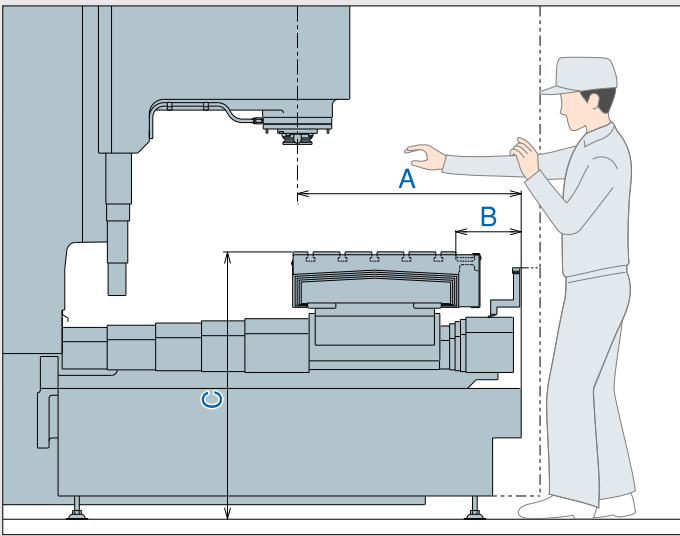

	VM43R II	VM53R II	VM76R II
A	715 (28.15")	770 (30.31")	1171 (46.10")
B	290 (11.42")	225 (8.86")	411 (16.18")
C	900 (35.43")	920 (36.22")	1000 (39.37")

Unit:mm



The front doors including the ceiling section open widely and allow smooth loading and unloading of workpieces with a crane. Large-sized VM76R II has storable steps and in-machine in its standard specifications for ease of the work inside the machine.



The photo shows VM76R II.

Wide machining area

Table size and travel distance

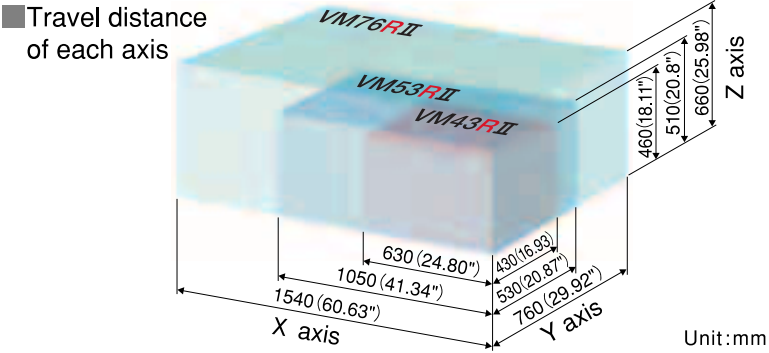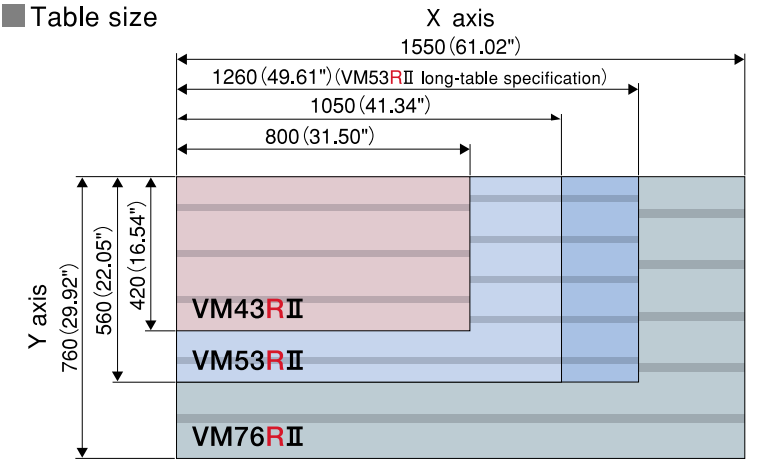

Unit:mm

Increased turning range of the operation panel enables visual check of the operation panel from inside of the machine. (Available on all models.)




The photo shows VM53R II.

Functions for high operability and environmental measures

Standard accessories

Compatibility with long tools (VM53R II / VM76R II)

The machines are compatible with 380-mm(14.96")-long long tools.

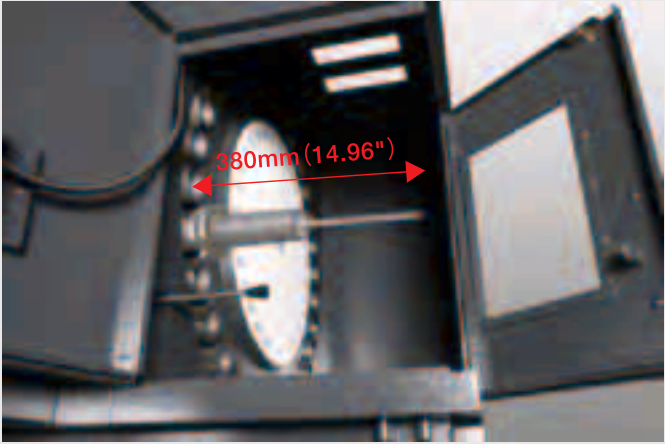

Two LED lights on the right and left sides inside the machine




Timer function for oil skimmer



This function enables operating the oil skimmer for a certain period of time after the automatic power-off. Operation time can be set freely. It helps keep the coolant clean by efficiently collecting the oil that flows into the tank just after stoppage of the machine.

Top covers

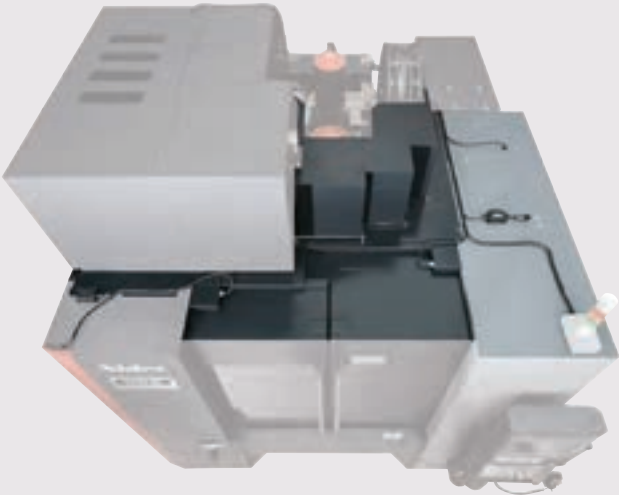

Cleaning gun



Nozzles for blowing air toward the spindle



Options for automatization

Manual pallet changer


The manual pallet changer saves labor and improves efficiency by setting up externally with the pallet setup unit installed outside the machine. It is retrofittable at low cost. You can layout the setup unit and the number of pallets freely. You can improve productivity while using the present machine.



Website video



The photo shows VM53R.

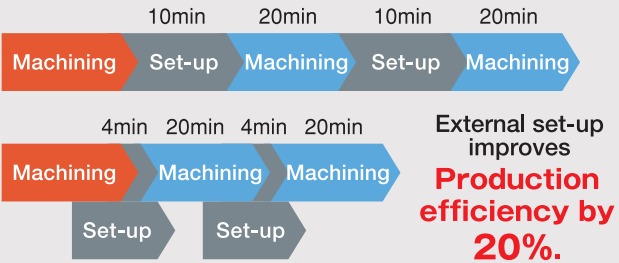


Tool attachment / detachment supporting device

This device enables access to the spindle from the table by just attaching a tool manually to the device placed on the table. Tools are exchanged automatically through the axial movement.



Website video

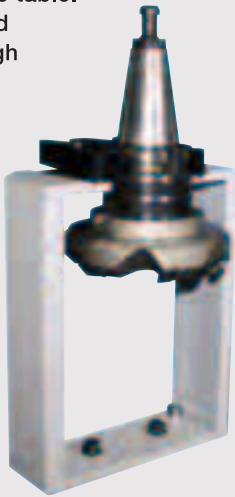

CRASYS — Robotic pallet change system

Robots take over the continued manufacturing for an hour after the operator moves away from the machine for lunch and after the closing time so as to improve operating efficiency of the machine. It is easily retrofittable to the existing machine. It is easy to operate and you can save labor easily.




Website video

The photo shows VM53R.



Result of the robotic operation



25% improvement of production efficiency

Remote-controlled nozzles

By changing the angle of nozzles easily with the M signals, you can supply coolant to the machining point efficiently. You can also expect the effect of longer tool life caused by the efficient coolant supply.



Website video





Other options





- Automatically opened and closed ATC cover
- Automatically opened and closed front doors, and other flexible measures are available.

Rich variations of the spindle allow appropriate selection according to the machining



No.40

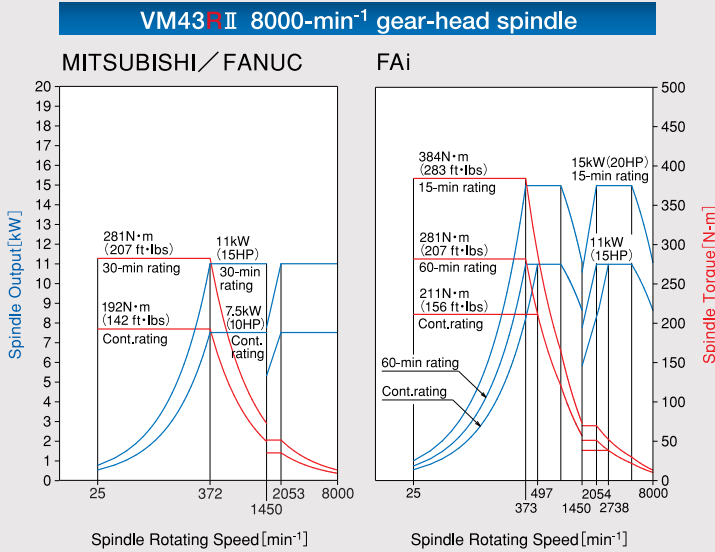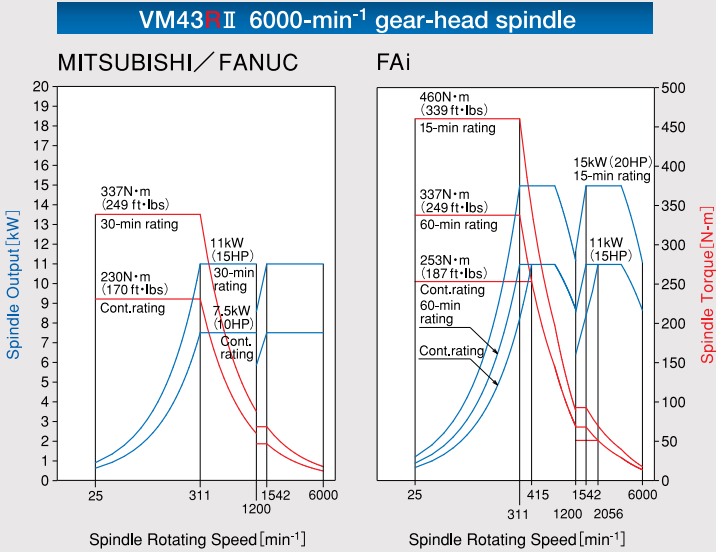

No.50

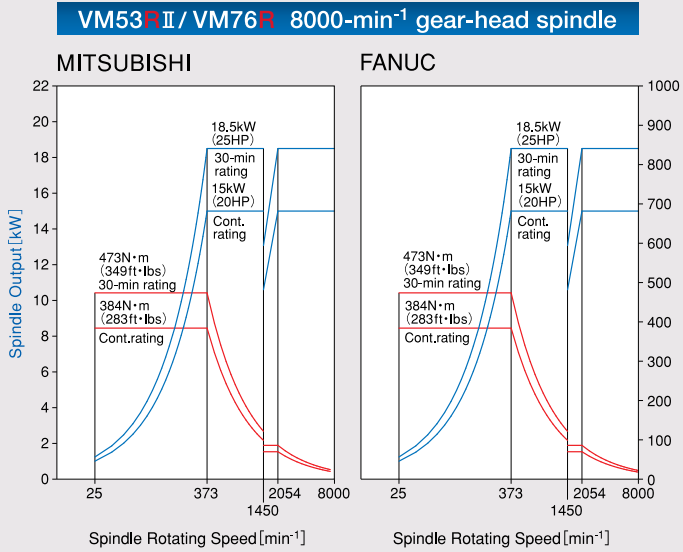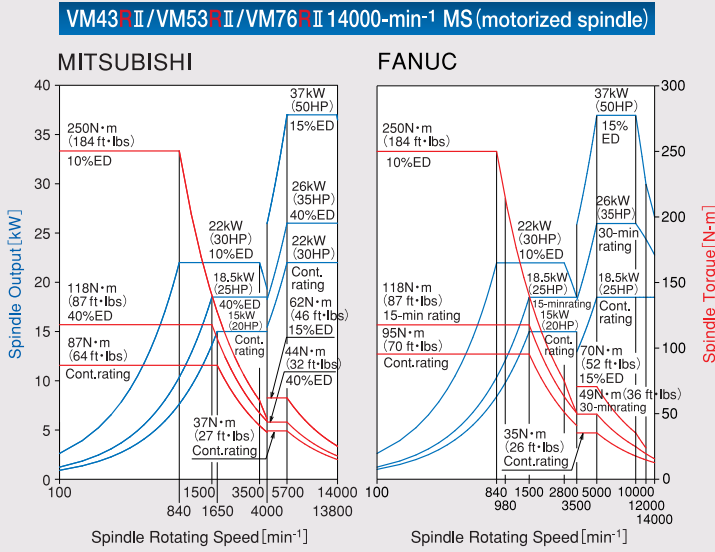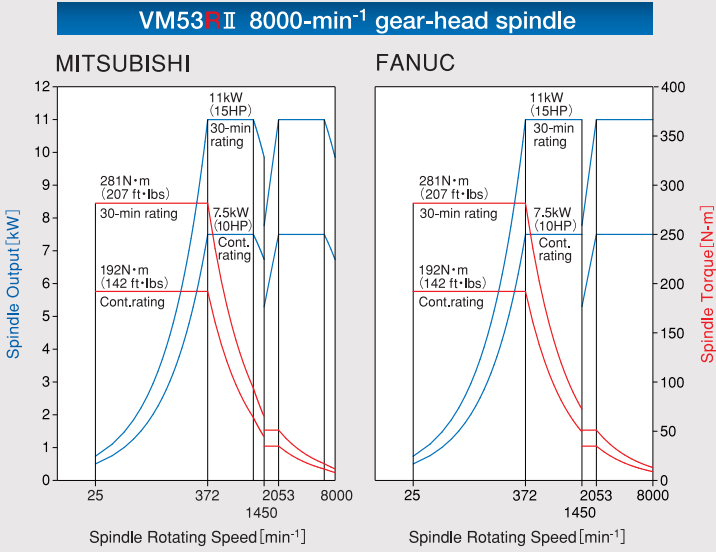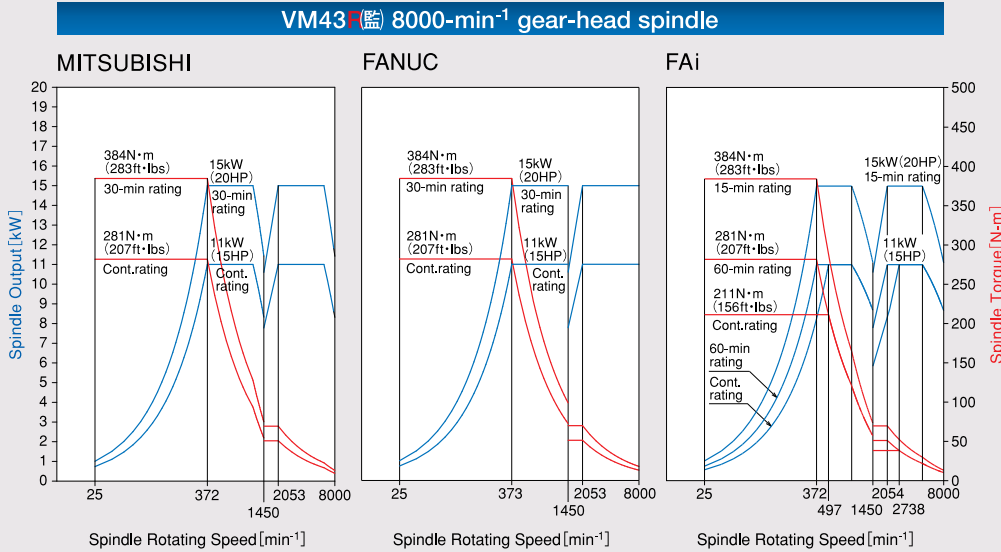


Highly rigid four-row angular bearing is used for all the spindles of this series.

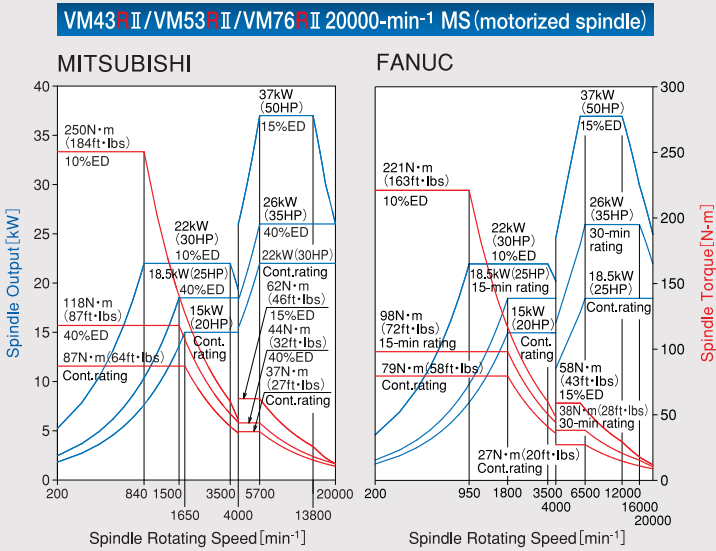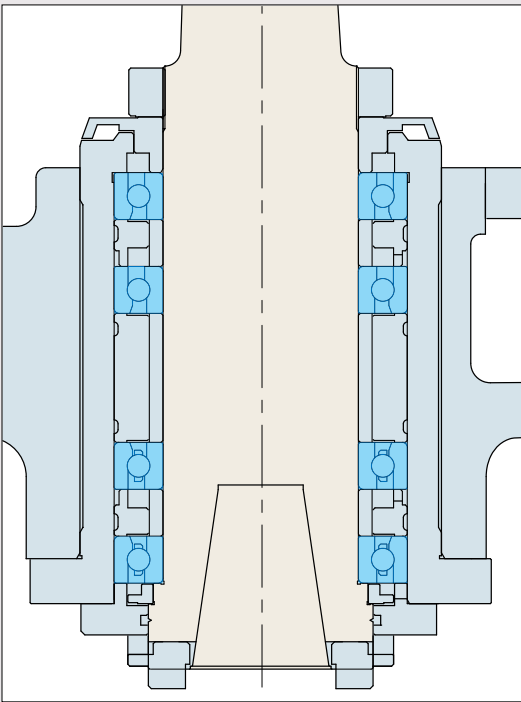

No.40

Model	Spindle	Controller	Spindle rotating speed	Spindle motor ratings (Short time/ Continuous)	Maximum spindle torque (Short time/ Continuous)	
VM43R II	Gear-head spindle	FANUC/MITSUBISHI	25~6000min ⁻¹	11(30-min rating)/7.5kW (15(30-min rating)/10HP)	337(30-min rating)/230N·m (249(30-min rating)/170ft·lbs)	VM43R II standard
		FAi		15(15-min rating)/11kW (20(15-min rating)/15HP)	460(15-min rating)/253N·m (339(15-min rating)/187ft·lbs)	
		FANUC/MITSUBISHI	25~8000min ⁻¹	11(30-min rating)/7.5kW (15(30-min rating)/10HP)	281(30-min rating)/192N·m (208(30-min rating)/142ft·lbs)	
		FAi		15(15-min rating)/11kW (20(15-min rating)/15HP)	384(15-min rating)/211N·m (283(15-min rating)/156ft·lbs)	
VM53R II	Gear-head spindle	FANUC/MITSUBISHI	100~14000min ⁻¹	11(30-min rating)/7.5kW (15(30-min rating)/10HP)	281(30-min rating)/192N·m (208(30-min rating)/142ft·lbs)	VM53R II standard
		FAi		15(15-min rating)/11kW (20(15-min rating)/15HP)	384(15-min rating)/211N·m (283(15-min rating)/156ft·lbs)	
VM43R II	MS	FANUC	100~14000min ⁻¹	11(30-min rating)/7.5kW (15(30-min rating)/10HP)	250(10%ED)/95N·m (184(10%ED)/70ft·lbs)	VM76R II standard
		MITSUBISHI	100~20000min ⁻¹	37(15%ED)/18.5kW (50(15%ED)/30HP)	221(10%ED)/79N·m (163(10%ED)/58ft·lbs)	

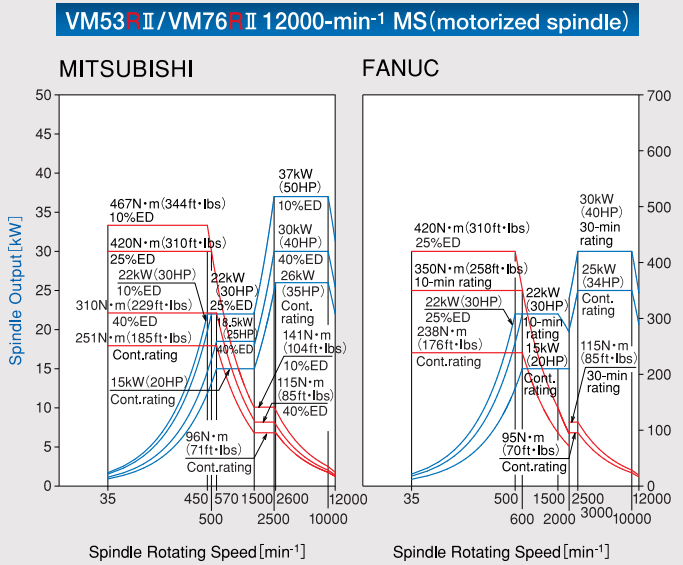

No.50

Model	Spindle	Controller	Spindle rotating speed	Spindle motor ratings (Short time/ Continuous)	Maximum spindle torque (Short time/ Continuous)	
VM43R II	Gear-head spindle	FANUC/MITSUBISHI	25~8000min ⁻¹	15(30-min rating)/11kW (20(30-min rating)/15HP)	384(30-min rating)/281N·m (283(30-min rating)/207ft·lbs)	VM43R II standard
		FAi		15(15-min rating)/11kW (20(15-min rating)/15HP)	384(15-min rating)/211N·m (283(15-min rating)/156ft·lbs)	
VM53R II	Gear-head spindle	FANUC/MITSUBISHI	25~8000min ⁻¹	18.5(30-min rating)/15kW (25(30-min rating)/20HP)	473(30-min rating)/349N·m (349(30-min rating)/253ft·lbs)	VM53R II standard
		FAi		18.5(15-min rating)/15kW (25(15-min rating)/20HP)	384(15-min rating)/281N·m (283(15-min rating)/207ft·lbs)	
VM76R II	MS	FANUC	100~12000min ⁻¹	30(30-min rating)/25kW (40(30-min rating)/34HP)	420(25%ED)/238N·m (309(25%ED)/176ft·lbs)	
		MITSUBISHI	100~12000min ⁻¹	37(10%ED)/26kW (40(10%ED)/35HP)	467(10%ED)/251N·m (344(10%ED)/185ft·lbs)	

High cutting capability and highly accurate high-quality machining

Highest-level heavy cutting capability

Cutting data Workpiece material : S45C

VM43R II:No.50 8000min⁻¹ 15/11kW(20/15HP)

VM53R II:No.50 8000min⁻¹ 18.5/15kW(25/20HP)

VM76R II:No.50 8000min⁻¹ 18.5/15kW(25/20HP)

	VM43R II	VM53R II / VM76R II
Type of machining	Face milling φ125(4.92") × 6T	
Spindle rotating speed	min ⁻¹ 500	560
Width of cut (A)	mm 100(3.94")	100(3.94")
Depth of cut (B)	mm 5(0.20")	6(0.24")
Feed rate	mm/min 720(28 ipm)	1000(39 ipm)
Cutting rate	cm ³ /min 360(21.96 in ³ /min)	600(36.60 in ³ /min)
Spindle motor load	% 112	123

	VM43R II	VM53R II / VM76R II
Type of machining	Side milling φ80(3.15") × 4T [Roughing end mill]	
Spindle rotating speed	min ⁻¹ 450	450
Width of cut (C)	mm 20(0.79")	30(1.18")
Depth of cut (D)	mm 50(1.97")	50(1.97")
Feed rate	mm/min 324(13 ipm)	270(11 ipm)
Cutting rate	cm ³ /min 324(19.76 in ³ /min)	405(24.70 in ³ /min)
Spindle motor load	% 101	89

	VM43R II	VM53R II / VM76R II
Type of machining	Drilling φ59(2.32") [Throw-away type]	
Spindle rotating speed	min ⁻¹ 650	650
Feed rate	mm/min 91(4 ipm)	91(4 ipm)
Feed	mm/rev 0.14(0.0058 in/rev)	0.14(0.0058 in/rev)
Cutting rate	cm ³ /min 249(15.19 in ³ /min)	249(15.19 in ³ /min)
Spindle motor load	% 102	73

	VM43R II	VM53R II / VM76R II
Type of machining	Tapping M30 × P3.5 M48 × P5	
Spindle rotating speed	min ⁻¹ 74	47
Feed rate	mm/min 259(10 ipm)	235(9 ipm)
Spindle motor load	% 35	85

The values shown above are reference values indicated as reference information about the cutting capability.

Good reliable structure realizes the highly accurate high-quality machining

Soft Scale III

Three functions for improving and maintaining accuracy

- 1 Variable backlash compensation II
Backlash changes with speed/position.
This function reduces the backlash by compensating it according to the slideway's characteristics (Patent No.4750496).
- 2 Ball screw elongation compensation
This function reduces the error generation caused by repeated feeding and positioning.
- 3 Spindle's thermal displacement compensation
This function compensates the thermal displacement caused by rotation of the spindle.


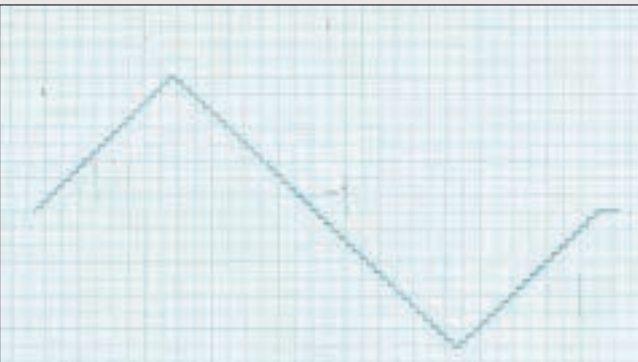


Diagram of 1-μm step-feed measurement

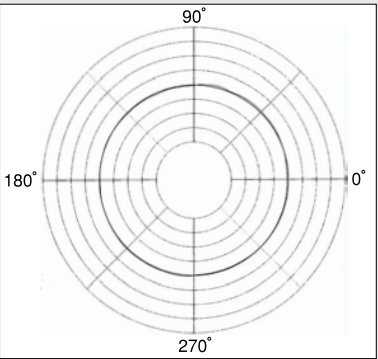

Circularity measurement example

Circularity measurement

VM43R II : 3.30 μm
VM53R II : 3.27 μm
VM76R II : 5.29 μm


* The above data show the actual values.
The results may vary with the conditions.

Accuracy

Positioning accuracy (mm)(Nidec OKK tolerance)

Item	VM43R II	VM53R II	VM76R II
Positioning accuracy	X/Y/Z : ±0.0025(±0.00010")/full stroke	X/Y/Z : ±0.0030(±0.00012")/full stroke	X : ±0.0050(0.00020")/full stroke Y/Z : ±0.0030(0.00012")/full stroke
Repeated positioning accuracy	X/Y/Z : ±0.0015(±0.00006")/full stroke	X/Y/Z : ±0.0020(±0.00008")/full stroke	X/Y/Z : ±0.0020(±0.00008")/full stroke

Positioning machining accuracy

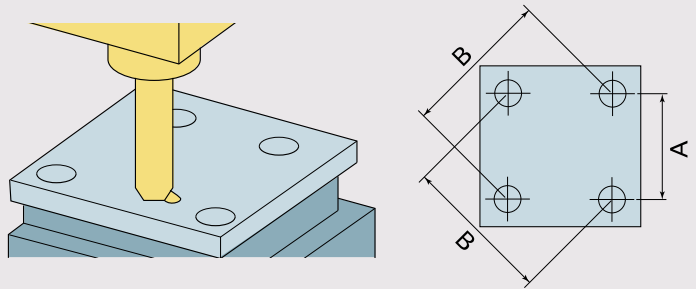

	VM43R II	VM53R II / VM76R II
A	150(5.91")	200(7.87")
B	212.132(8.35")	282.843(11.14")


Example of actual machining (Unit : mm)

Item	VM43R II	VM53R II	VM76R II
Axial direction	0.006(0.00024")	0.004(0.00016")	0.006(0.00024")
Diagonal direction	0.004(0.00016")	0.001(0.00004")	0.003(0.00012")
Difference in diameter	0.006(0.00024")	0.001(0.00004")	0.005(0.00020")

- Notes
1. The data of the short-term machining are shown above as an example.
The results of the continuous machining may be different from the above.
2. The accuracy data obtained under Nidec OKK's in-house cutting test conditions are shown above as an example.
The results may vary with the cutting tools and the used jigs.
3. The above accuracy data are the laboratory data obtained by installing the machine according to Nidec OKK's foundation drawing and carrying the inspection based on Nidec OKK's inspection standard in an environment with controlled temperature.



Enhanced measures against thermal displacement

In addition to the side face cooling, the No.50 gear-head spindles for VM53R II and VM76R II have the structure for circulating the cooling oil in the front face.

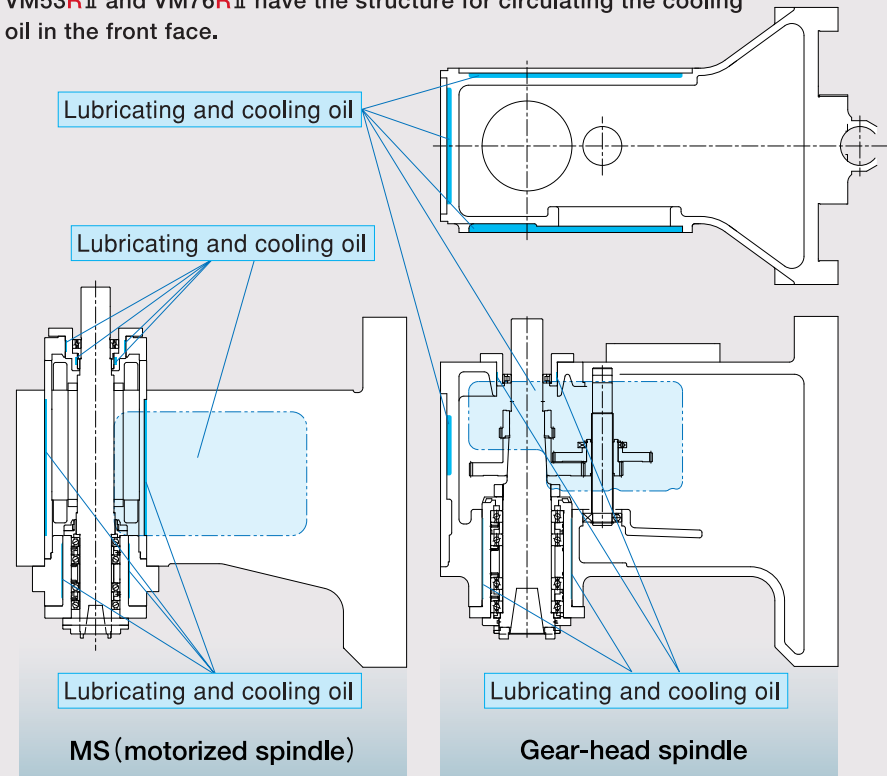

2-ton specification for allowable mass of a workpiece on the table (Option for VM76R II)


The small-lead ball screw used for the Y axis increases rigidity of the feed system and improves the machining accuracy. In addition, the hydrostatic air bearing decreases the frictional resistance and reduces the loading weight of the table. This specification helps improve the positioning accuracy, the characteristic of micro step feeding precision, and circularity.

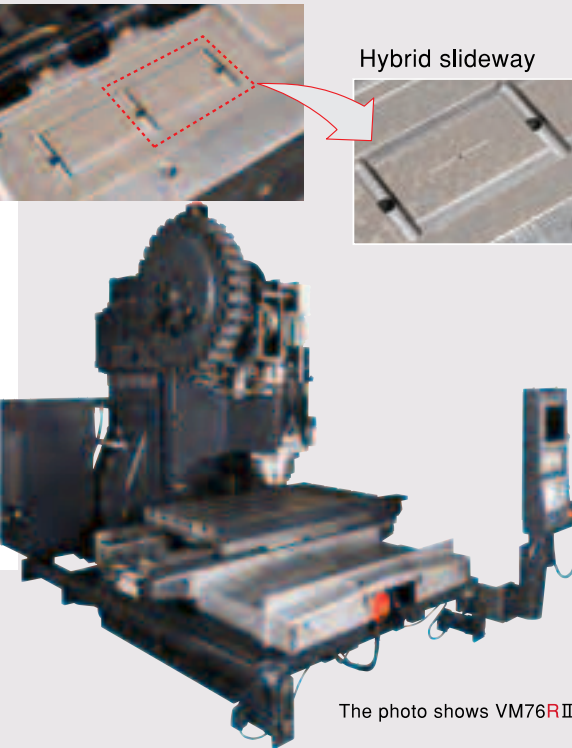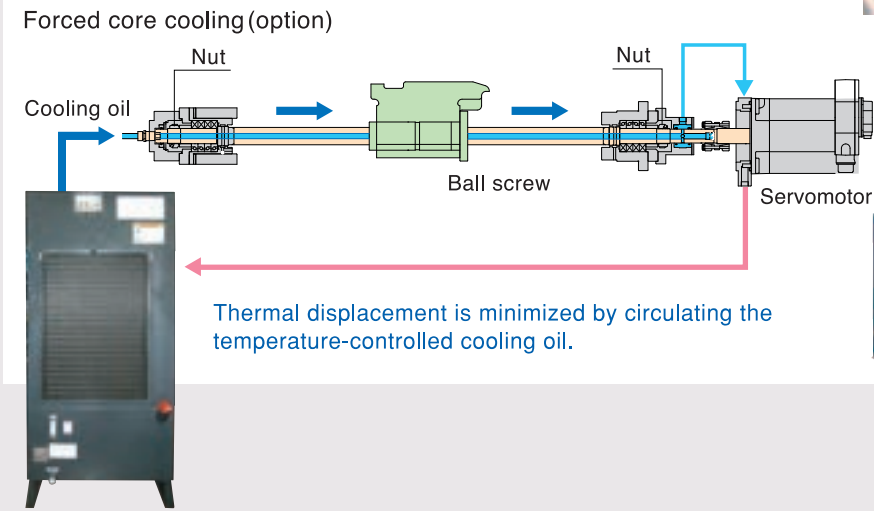


Nidec OKK's original environmental thermal displacement correction

Soft Scale Cube

Thermal displacement is corrected adequately by estimating thermal deformation of the reference space assumed in the machining center's machining area based on the information obtained through the temperature sensors in various sections of the machine structure.

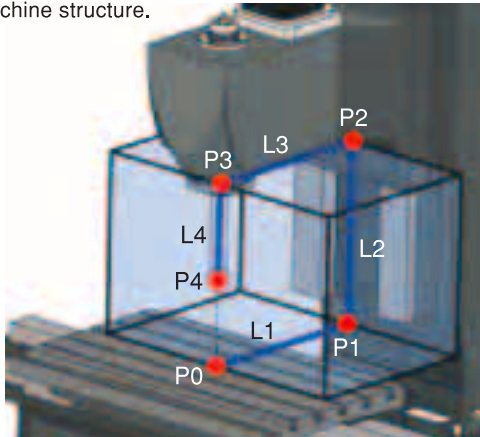

Environmental thermal displacement measurement result $8\mu\text{m}/8^\circ\text{C}$ can be attained with Soft Scale Cube.

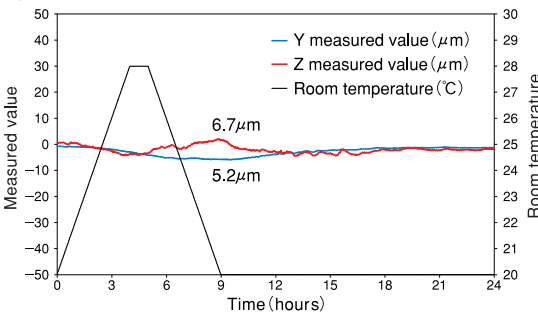

Automatic workpiece measurement by the use of a TOF camera

3D MEISTER (option)



3D MEISTER

A TOF camera installed inside the machine is used for 3D modeling of an actual workpiece. In combination with the Touch Sensor System T1-A, Easily take the measurements to the center the workpiece.



Photographing an actual workpiece





3D modeling



Automatic measurement for centering the workpiece

Batch management of data by using a PC/Smartphone

Net Monitor (option)

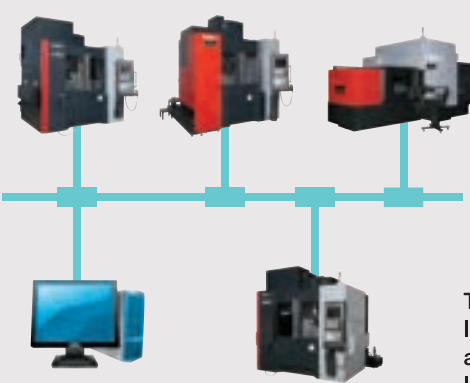

This function supports connection, visualization and utilization of data of the machine. It monitors the operating performance, the operation history, and the machining results and aggregates their data. It also enables batch management of the machining programs by the use of a PC.


Net Monitor remote control function (option)



At the desks...



On the move...

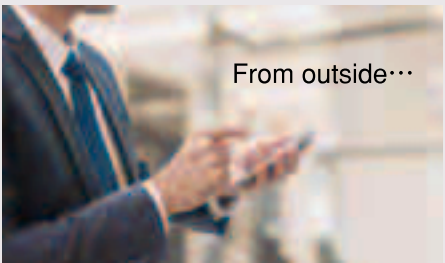

From outside...

Net Monitor is linked to the cloud service. You can check a status of the machine and progress of machining even when you are outside the company or at home and even through a smartphone. There is also the remote-control switch function.

Nidec OKK's Dedicated Control Functions

Programming Support Functions


■ Program Editor

It enables editing the programs in the NC memory, the data server (or hard discs) and the memory cards. It also enables managing the programs, i.e., copying, deleting, changing the program name, etc.




■ EasyPRO (Programming Support Function)

You can display the interactive guide screen and, while referring to the displayed guide charts and description, you can input the programs such as the macro programs for machining and measuring. The incorporated easy-to-operate CAD functions can be used for the input of coordinates, contour machining, etc.

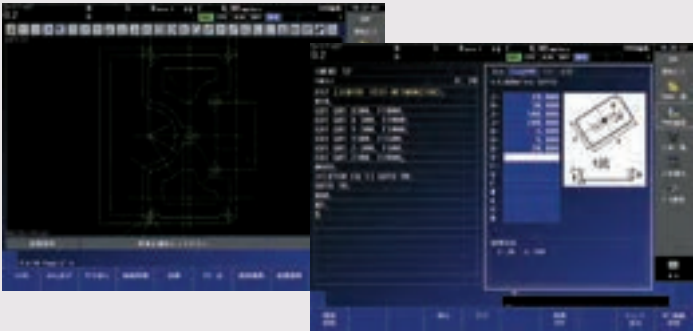


■ WinGMC8 (N830 standard function)

It is an interactive automatic NC programming function that is user-friendly. It contains various menus such as the hole drilling, contouring, and pocketing. As the machining conditions and machining movements are determined automatically, you can make machining programs easily even if you are not familiar with the NC programs.

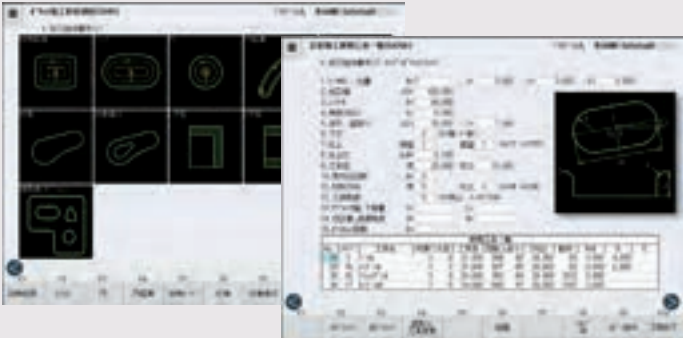

● Option H

It enables machining the pocket with multiple islands. As it contains the easy-to-operate CAD functions, you can use them to read out the CAD data and draw figures for machining complicated shapes.

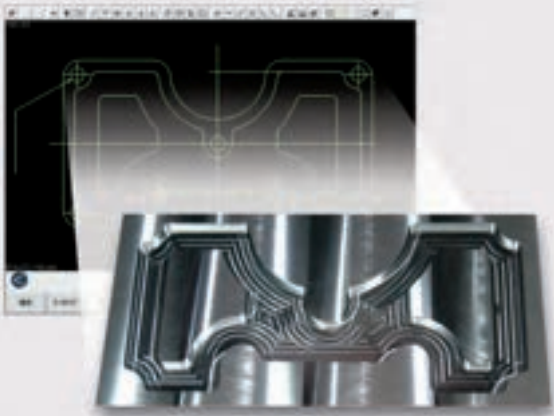

Performance Management and Maintenance Function

■ Help Guidance

It displays detailed information regarding the machine alarms and the method to recover when a problem occurs on the machine. It also displays a list of G-codes and description of the M signals.



■ Work Manager (Option)

It enables managing the number of machined workpieces and controlling the operation rate easily. It is useful for managing the machine's operational statuses as you can output and write the data to the memory cards.



High-efficiency Control Function

■ Hyper HQ Control (Option)

It improves the minute line segments processing capability and enables the high-speed machining.

<N830's minute line segments processing capability>

Specification	Line segment data processing speed (m/min)	Commands
Without Hyper HQ control	16.8 (661 ipm)	
Hyper HQ control mode I	33.7 (1327 ipm)	ON : G5P1 OFF : G5P0
Hyper HQ control mode II	168 (6614 ipm)	ON : G5P2 OFF : G5P0


<F31i's minute line segments processing capability>

Specification	Line segment data processing speed (m/min)	Commands
Without Hyper HQ control	15.0 (591 ipm)	
Hyper HQ control mode A	30.0 (1181 ipm)	ON : G5.1Q1 OFF : G5.1Q0
Hyper HQ control mode B	150 (5906 ipm)	ON : G5.1Q1 OFF : G5.1Q0

The above values show (theoretical) maximum speeds for processing 1-mm-segment blocks constructing a straight line.

■ HQ Tuner (Option)


It enables adjusting the parameters for the hyper HQ control according to the machining conditions. The hyper HQ control can be adjusted according to the process. For example, for roughing, the machining time can be reduced while focusing on the machining speed, and, for finishing, geometric accuracy of corners and arcs is improved by focusing on accuracy.



Setup Support Functions


■ Tool Support

It enables batch management of each tool's various information such as the tool name, the form figure, and the offset number through a single screen. As it enables the tool measurement by just switching the menu, it is convenient for the setup operation.

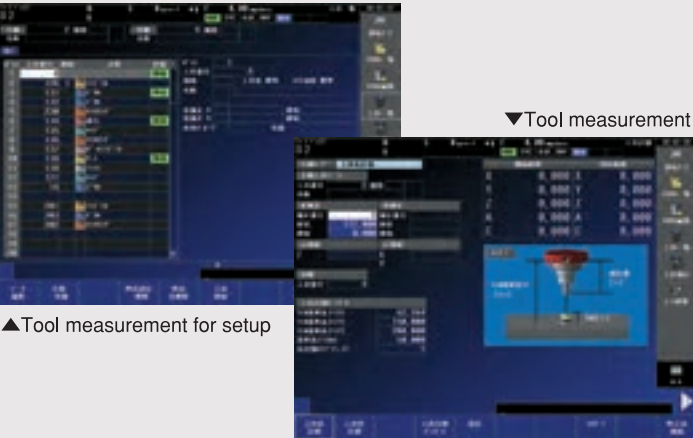

■ T0 Softwaer (Option)

By just operating the handle and moving the sensor to the desired measuring point, you can measure manually and easily. Results of the measurement can be set as the data of the workpiece coordinate system or a specific tool offset number through the single key operation. (Touch Sensor T1-A or T1-B (option) is necessary.)

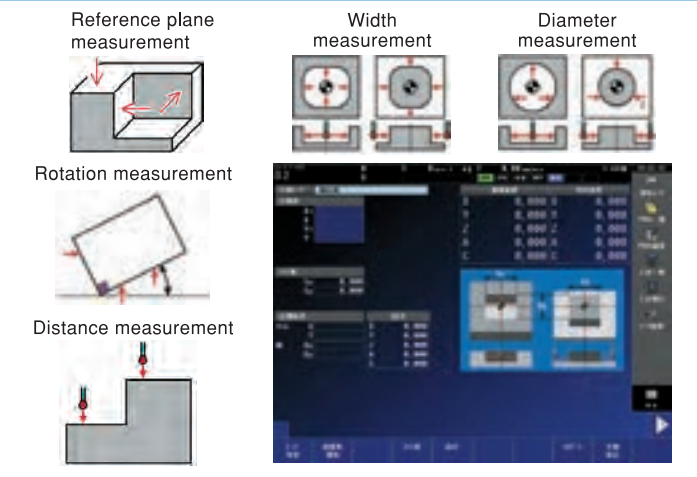

Functions for Reduced Setup and Unmanned Operation

■ Soft AC (Option)

This function applies the feed rate override control automatically so that the value of the spindle load meter is constant. It helps prevent damages to tools caused by overload and improve cutting efficiency.

● Adaptive control function

Feed override control in the range of 10 to 200% is available. (An alarm is issued at the time of reaching the override lower limit value.)

● Air-cut reduction function

Feed rates during non-cutting operation can be increased up to 200%.

● Tool failure monitoring function

Specifications are similar to the soft CCM.

● Continuous unmanned machining at the time of tool failure

It can be combined with the automatic restart function (different option).

■ Soft CCM (Option)

It monitors the spindle load meter and stops operation when the meter value exceeds the preset value (set with the M signal or set for the relevant T numbers through the setting screen) and generation of abnormal tool load is determined.


Network Function

■ Data Server (Option for F31i)

Large machining programs can be transferred to the data server through the network connected to the host computer. The transferred machining programs are executed as main programs or sub programs that are called up by using the M198.

■ Hard Disc Operation (N830 standard function)

Large machining programs can be transferred to the hard disc inside the machine through the network connected to the host computer. The transferred machining programs are executed as main programs or sub programs.

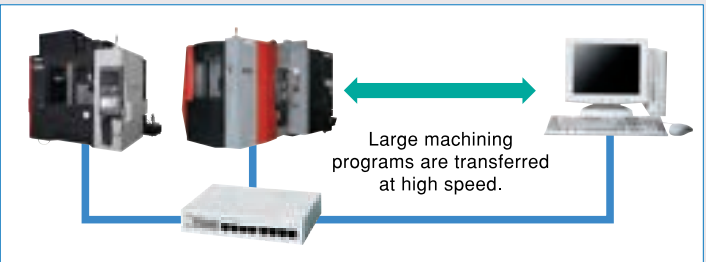

Specification of Machine Main Body

Item	Unit	Specification	
		No.40	No.50
		Gear-head spindle	
		8000min ⁻¹	
Travel on X axis (Table longitudinal direction)	mm	630 (24.80")	
Travel on Y axis (Saddle cross direction)	mm	430 (16.93")	
Travel on Z axis (Spindle head vertical direction)	mm	460 (18.11")	
Distance from table top surface to spindle nose	mm	150 to 610 (5.91" to 24.02")	
Distance from column front to spindle center	mm	445 (17.52")	
Table work surface area (X-axis direction×Y-axis direction)	mm	800 × 420 (31.50"×16.54")	
Max. workpiece mass loadable on table	kg	500 (1102 lbs)	
Table work surface configuration (T-slot nominal dimension × spacing × number of T slots)	mm	18 × 125 × 3 slots (0.71" × 4.92" × 3 slots)	
Distance from floor surface to table work surface	mm	900 (35.43")	
Spindle rotating speed	min ⁻¹	25 to 8000	
Number of spindle rotating speeds		2 speeds	
Spindle nose (Nominal number)		7/24-tapered No.40 Two-surface locking type	7/24-tapered No.50 Two-surface locking type
Spindle bearing bore diameter	mm	φ 70 (dia.2.76")	φ 85 (dia.3.35")
Rapid traverse rate	m/min	X/Y:30 (1181ipm)	Z:20 (787ipm)
Cutting feed rate	mm/min	1 to 20000 (0.04 to 787ipm) (See Note 1)	
Jog feed rate	mm/min	2000 (79ipm)	
Type of tool shank (Nominal number)		BT40 two-surface locking tool	BT50 two-surface locking tool
Type of pull stud (Nominal number)		MAS1 45°	OKK 90°
Number of storable tools	tools	20	
Max. tool diameter (with tools in adjoining pots)	mm	φ 82 (dia.3.23")	φ 108 (dia.4.25")
Max. tool diameter (with no tools in adjoining pots)	mm	φ 110 (dia.4.33")	φ 160 (dia.6.30")
Max. tool length (from the gauge line)	mm	350 (13.78") (300 (dia 11.81") (See Note 2))	
Max. tool mass (moment)	kg (N·m)	10 (22 lbs) (9.8 (7ft·lbs))	20 (44 lbs) (29.4 (22ft·lbs))
Tool selection method		Memory random method	
Tool exchange time (tool-to-tool)	sec	1.5 (Speed is changeable for heavy tools.)	2.0 (Speed is changeable for heavy tools.)
Tool exchange time (cut-to-cut)	sec	5.0 (12.0 (See Note 2))	5.9 (12.9 (See Note 2))
Spindle motor (Short-term rating / Continuous rating)	MITSUBISHI	kW	11/7.5 (15/10HP)
	FANUC (F31i-B)	kW	11/7.5 (15/10HP)
	FAi	kW	15/11 (20/15HP)
Feed motor	MITSUBISHI	kW	X/Y:2.0 (2.7HP)
	FANUC (F31i-B)	kW	X/Y:3.0 (4HP)
	FAi	kW	X/Y:1.8 (2.4HP)
Motor for coolant pump	kW	1.1 (1.5HP) (60Hz) / 0.75 (1.01HP) (50Hz)	
Motor for slideway lubrication pump	kW	0.017 (0.02HP)	
Motor for spindle head cooling pump (oil cooler)	kW	1.2 (1.61HP) (compression) / 0.75 (1.01HP) (discharge)	
Motor for unclamping the spindle tool / ATC	kW	0.4 (0.54HP)	0.75 (1.01HP)
Motor for turning the magazine	kW	0.2 (0.27HP)	0.4 (0.54HP)
Motors for coil-type chip conveyors	kW	0.2 × 2 (0.3HP × 2)	
Power supply (See Note 3)	MITSUBISHI	kVA	26
	FANUC (F31i-B)	kVA	24
Supply voltage and supply frequency	V·Hz	200V ± 10% 50/60Hz ± 1Hz 220V ± 10% 60Hz ± 1Hz	
Compressed air supply pressure (See Note 4)	MPa	0.4 to 0.6 (58psi to 87psi)	
Compressed air supply flow rate (Atmospheric pressure) (See Notes 3 and 4)	L / min (ANR)	360 (95 gal) or more	
Coolant tank capacity (See Notes 3)	L	250 (66 gal)	
Spindle head cooling oil tank capacity (oil cooler)	L	50 (13 gal)	
Slideway lubrication oil tank capacity	L	6.0 (1.6 gal)	
Machine height (from the floor surface)	mm	2623 (103.27")	2713 (106.81")
Required floor space (width × depth)	mm	1980×2710 (77.95"×106.69")	2090×2710 (82.28"×106.69")
Machine mass	kg	5500 (12100 lbs)	5700 (12600 lbs)
Operating environment temperature	℃	5 to 40	
Operating environment humidity	%	10 to 90 (No condensation)	

Note 1: The feed rate under the HQ or Hyper HQ control.
Note 2: ATC shutter specification
Note 3: The value for the standard specification. It may vary with added options.
Note 4: Purity of the supplied air should be equivalent to or higher than the Classes 3, 5 and 4 specified in ISO 8573-1 / JIS B8392-1.
Note: Use the machine in the appropriate environment as the machine installation environment affects accuracies of the machine and the machining.


Standard Accessories

Name	Qty	Remark
Lighting system	1 set	Two LED lamps
Coolant unit (Separately-installed coolant tank)	1 set	Tank capacity : 250L (66 gal)
Overall machine cover (Splash guard)	1 set	Including electromagnetic locks on front doors and right and left maintenance covers
Magazine safety cover	1 set	Including electromagnetic lock
Slideway protection steel sliding covers for X, Y and Z axes	1 set	
Spindle head lubricating oil temperature controller	1 set	
Slideway lubrication unit	1 set	
Rear-discharging coil-type chip conveyor (including the reverse rotation function)	2 sets	1 set for each of right and left sides
Oil skimmer	1 set	Screw type
Air blower	1 set	
Signal lamp	1 set	3-lamp type including buzzer alarm
Workpiece cleaning gun	1 set	Shower gun type (normal pressure)
Tool removing device	1 set	Manual operation type
Leveling block	1 set	
Earth leakage breaker	1 set	
Automatic power off (with M02 or M30)	1 set	
Electrical spare parts (fuses)	1 set	
Safety manual and instruction manual for Soft Scale II / III	1 set / each	
Instruction manual, Foundation and Installation Instruction Manual, and Standard Specifications	1 set / each	Standard Specifications are not included when Final Specifications are submitted.
Electrical instruction manual	1 set	Including electrical diagrams
Instruction manual for integrated machining support software	1 set	Including the manuals for Program Editor and Tool Support. Manuals are not submitted when FANUC Ai controller is used.
Supplementary manual for Manual Guide i	1 set	This manual is not submitted when MITSUBISHI controller is used.
Manual for controller (NC)	1 set	CD-ROM
Programming manual and operating procedures	1 set / each	

Special Accessories


Item	Specification
Spindle motor	6000min ⁻¹ (11/7.5kW (15/10HP)) (MITSUBISHI/FANUC) (No.40 gear-head) 14000min ⁻¹ (37/26/22kW (50/35/30HP)) (MITSUBISHI) (No.40-MS) 14000min ⁻¹ (37/26/18.5kW (50/35/25HP)) (FANUC) (No.40-MS) 20000min ⁻¹ (37/26/22kW (50/35/30HP)) (MITSUBISHI) (No.40-MS) 20000min ⁻¹ (37/26/18.5kW (50/35/25HP)) (FANUC) (No.40-MS)
Type of tool shank	CAT40, DIN40 / CAT50, DIN50
Type of pull stud	No.40: MAS2 (60°) / OKK 90° No.50: MAS1 (45°) / MAS2 (60°)
Number of storable tools	30 tools (Drum type) (No.40 only)
Pallet changer	Shuttle-type APC (T-slots / Tapped holes on pallet work surface specification)
Column raise (Column-UP)	200mm (7.87") (Standard for the machine with APC)
Ejection of chips from the machine	Chip flushing with coolant (Sharing with the coil-type chip conveyor is not possible.) / Coil-type chip conveyor is excluded.
Splash guard	Front door automatic opening and closing specification
Automatically opened and closed ATC cover	Max. tool length is limited to 300mm (11.81").
Signal lamp	2-lamp type with/without buzzer alarm
Linear scale	X axis, Y axis, Z axis / X axis, Y axis
Compatibility with through-spindle	2-MPa (290psi) coolant / 7-MPa (1015psi) coolant / Air / Preparation for coolant
Coolant cooler	Separate tank specification / Integrated with the high-pressure unit (High-pressure unit needs to be selected separately.)
Oil mist blower	
Minimal quantity coolant supply system	
Spindle-nose swirl stopper block	For high-power spindle / For angle attachment
Compatibility with oil hole holder	
Mist collector	Installed separately / Installation of the supplied equipment
Lift-up type chip conveyor	Hinged type / Scraper type / Scraper type with floor magnet / Backwashing filtration type for aluminum / Backwashing filtration type for aluminum and casting Chip discharge from left / right side
Chip bucket	Fixed chip bucket / Tilting chip bucket
Spare Thickener bag filter	6 pieces (1 set)
Change of operation panel	Pendant type / Movable console type
3-axis manual pulse generator	Stand type / Handy type
Foundation parts	For bond anchoring method
Bond for foundation work	HILTI
Change in machine coating color	Color specified by customer
Standard tool set	Including a tool box
NC rotary table	
Electrical indexing table (Rotary table with controller)	
Touch sensor system T0	Workpiece measurement, Tool length / diameter measurement
Touch sensor system T1 (Workpiece measurement)	Workpiece measurement
Touch sensor system T1 (Tool measurement)	Tool length measurement, Tool break detection

Side View

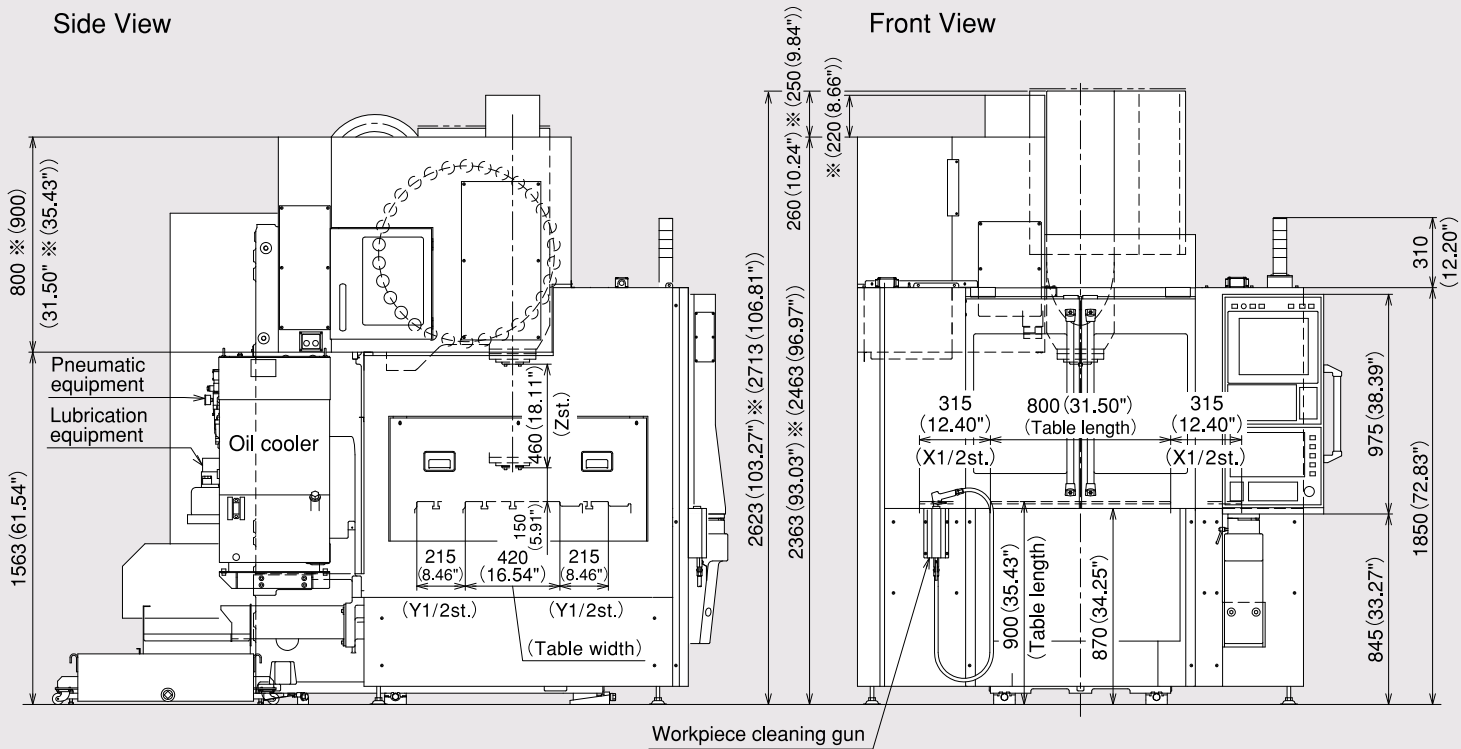

Note: Asterisked dimension changes with the machine specification.
※ : No.50

Floor Space

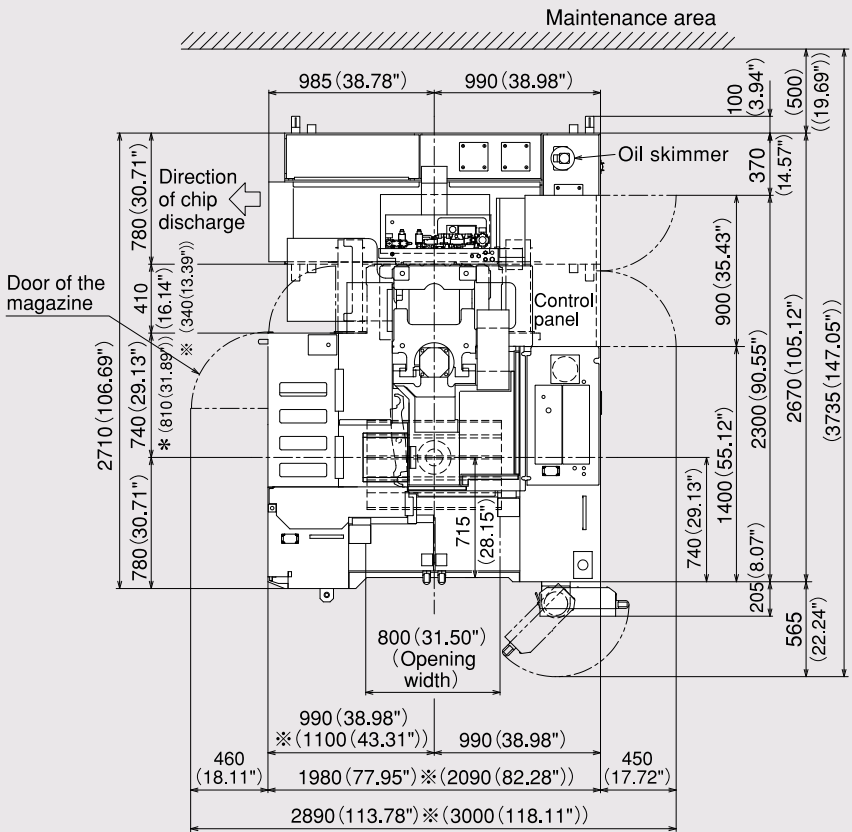

Specification of Machine Main Body

Item	Unit	Specification	
		No.40	No.50
		MS (Motorized spindle) 14000min ⁻¹	Gear-head spindle 8000min ⁻¹
Travel on X axis (Table longitudinal direction)	mm	1540 (60.63")	
Travel on Y axis (Saddle cross direction)	mm	760 (29.92")	
Travel on Z axis (Spindle head vertical direction)	mm	660 (25.98")	
Distance from table top surface to spindle nose	mm	150~810 (5.91" to 31.89")	
Distance from column front to spindle center	mm	785 (30.91")	
Table work surface area (X-axis direction×Y-axis direction)	mm	1550×760 (61.02"×29.92")	
Max. workpiece mass loadable on table	kg	1500 (3300 lbs)	
Table work surface configuration (T-slot nominal dimension × spacing × number of T slots)	mm	22×140×5 slots (0.87"×5.51"×5 slots)	
Distance from floor surface to table work surface	mm	1000 (39.37")	
Spindle rotating speed	min ⁻¹	100 to 14000	25 to 8000
Number of spindle rotating speeds		2 speeds	
Spindle nose (Nominal number)		7/24-tapered No.40 Two-surface locking type	7/24-tapered No.50 Two-surface locking type
Spindle bearing bore diameter	mm	φ70 (dia.2.76")	φ100 (dia.3.94")
Rapid traverse rate	m/min	X/Y:24 (945 ipm)	Z:200 (787 ipm)
Cutting feed rate	mm/min	1~20000 (0.04" to 787 ipm) See note 1	
Jog feed rate	mm/min	2000 (79 ipm)	
Type of tool shank (Nominal number)		BT40 two-surface locking tool	BT50 two-surface locking tool
Type of pull stud (Nominal number)		MAS1 45°	OKK 90°
Number of storable tools	tools	30	
Max. tool diameter (with tools in adjoining pots)	mm	φ80 (dia.3.15")	φ103 (dia.4.06")
Max. tool diameter (with no tools in adjoining pots)	mm	φ110 (dia.4.33")	φ200 (dia.7.87")
Max. tool length (from the gauge line)	mm	380 (14.96")	
Max. tool mass (moment)	kg (N·m)	10 (22 lbs) (9.8 (7ft-lbs))	20 (44 lbs) (29.4 (22ft-lbs))
Tool selection method		Memory random method	
Tool exchange time (tool-to-tool)	sec	2.0 (Speed is changeable for heavy tools.)	
Tool exchange time (cut-to-cut)	sec	7.0 (16.0 (See Note 2))	
Spindle motor (Short-term rating / Continuous rating)	MITSUBISHI	kW	37/22 (50/30HP)
	FANUC (F31i-B)	kW	18.5/15 (25/20HP)
Feed motor	MITSUBISHI	kW	X/Y:4.5 (6HP)
	FANUC (F31i-B)	kW	X/Y:7.0 (9.4HP)
Motor for coolant pump	kW	1.1 (1.5HP) (60Hz) / 0.75 (1.01HP) (50Hz)	
Motor for slideway lubrication pump	kW	0.017 (0.02HP)	
Motor for spindle head cooling pump (oil cooler)	kW	1.2 (1.61HP) (compression) / 0.75 (1.01HP) (discharge)	
Motor for spindle oil-air lubrication pump	kW	0.017 (0.023HP) (60Hz) / 0.018 (0.024HP) (50Hz)	
Motor for unclamping the spindle tool / ATC	kW	0.4 (0.54HP)	
Motor for turning the magazine	kW	0.2 (0.27HP)	
Motors for coil-type chip conveyors	kW	0.2 (0.27HP) × 2	
Power supply (See Note 3)	MITSUBISHI	kVA	46
	FANUC (F31i-B)	kVA	41
Supply voltage and supply frequency	V·Hz	200V±10% 50/60Hz±1Hz 220V±10% 60Hz±1Hz	
Compressed air supply pressure (See Note 4)	MPa	0.4 to 0.6 (58psi to 87psi)	
Compressed air supply flow rate (Atmospheric pressure) (See Notes 3 and 4)	L/min (ANR)	400 (106gal) or more	
Coolant tank capacity (See Notes 3)	L	600 (159gal) or more	
Spindle head cooling oil tank capacity (oil cooler)	L	50 (13gal)	
Spindle oil-air lubrication oil tank capacity	L	2.0 (0.5gal)	
Slideway lubrication oil tank capacity	L	6.0 (1.6gal)	
Machine height (from the floor surface)	MITSUBISHI	mm	3130 (123.23")
	FANUC (F31i-B)	mm	3300 (129.92")
Required floor space (width × depth)		3980×3700	
Machine mass	kg	13000 (28700 lbs)	
Operating environment temperature	℃	5 to 40	
Operating environment humidity	%	10 to 90 (No condensation)	

Note 1: The feed rate under the HQ or Hyper HQ control.
Note 2: ATC shutter specification
Note 3: The value for the standard specification. It may vary with added options.
Note 4: Purity of the supplied air should be equivalent to or higher than the Classes 3, 5 and 4 specified in ISO 8573-1 / JIS B8392-1.
Note: Use the machine in the appropriate environment as the machine installation environment affects accuracies of the machine and the machining.


Standard Accessories

Name	Qty	Remark
Lighting system	1 set	Two LED lamps
Coolant unit (Separately-installed coolant tank)	1 set	Tank capacity :250L (66 gal)
Overall machine cover (Splash guard)	1 set	Including electromagnetic locks on front doors and right and left maintenance covers
Magazine safety cover	1 set	Including electromagnetic lock
Slideway protection steel sliding covers for X, Y and Z axes	1 set	
Spindle head lubricating oil temperature controller	1 set	
Slideway lubrication unit	1 set	
Oil-air unit	1 set	
Rear-discharging coil-type chip conveyor (including the reverse rotation function)	1 set	1 set for each of right and left sides
Oil skimmer	1 set	Screw type
Air blower	1 set	
Signal lamp	1 set	3-lamp type including buzzer alarm
Workpiece cleaning gun	1 set	Shower gun type (normal pressure)
Tool removing device	1 set	Manual operation type
Leveling block	1 set	
Earth leakage breaker	1 set	
Automatic power off (with M02 or M30)	1 set	
Electrical spare parts (fuses)	1 set	
Safety manual and instruction manual for Soft Scale II m / III	1 set / each	
Instruction manual, Foundation and Installation Instruction Manual, and Standard Specifications	1 set / each	Standard Specifications are not included when Final Specifications are submitted.
Electrical instruction manual	1 set	Including electrical diagrams
Instruction manual for integrated machining support software	1 set	Including the manuals for Program Editor and Tool Support.
Supplementary manual for Manual Guide i	1 set	This manual is not submitted when MITSUBISHI controller is used.
Manual for controller (NC)	1 set	CD-ROM
Programming manual and operating procedures	1 set / each	


Special Accessories

Item	Specification
Type of feeding equipment	Double anchor specification, Ball screw cooling
2000-kg loading capacity of the table	Ball screw dedicated to Y axis, Y-axis static pressure guiding specification, Double anchor specification, Ball screw cooling
Spindle motor	20000min ⁻¹ (37/26/22kW) (50/35/30HP) (MITSUBISHI) (No.40-MS) 20000min ⁻¹ (37/26/18.5kW) (50/35/25HP) (FANUC) (No.40-MS) 12000min ⁻¹ (37/30/26kW) (50/40/35HP) (MITSUBISHI) (No.50-MS) 12000min ⁻¹ (30/25kW) (40/34HP) (FANUC) (No.50-MS)
Type of tool shank	CAT40, DIN40 / CAT50, DIN50
Type of pull stud	No.40: MAS2 (60°) / OKK 90° No.50: MAS1 (45°) / MAS2 (60°)
Number of storable tools	40 tools, 60 tools (Chain type) / (60 tools are available only in the case of No. 50)
Pallet changer	Shuttle-type APC (T-slots / Tapped holes on pallet work surface specification)
Column raise (Column-UP)	250mm (9.84") (Standard for the machine with APC)
Ejection of chips from the machine	Chip flushing with coolant (Sharing with the coil-type chip conveyor is not possible.) / Coil-type chip conveyor is excluded.
Splash guard	Front door automatic opening and closing specification
Automatically opened and closed ATC cover	
Signal lamp	2-lamp type with/without buzzer alarm
Linear scale	X axis, Y axis, Z axis / X axis, Y axis
Compatibility with through-spindle	2-MPa (290psi) coolant / 7-MPa (1015psi) coolant / Air / Preparation for coolant
Coolant cooler	Separate tank specification / Integrated with the high-pressure unit (High-pressure unit needs to be selected separately.)
Oil mist blowe	
Minimal quantity coolant supply system	
Spindle-nose swirl stopper block	For high-power spindle / For angle attachment
Compatibility with oil hole holder	
Mist collector	Installed separately / Installation of the supplied equipment
Lift-up type chip conveyo	Hinged type / Scraper type / Scraper type with floor magnet / Backwashing filtration type for aluminum / Backwashing filtration type for aluminum and casting Chip discharge from left / right side
Spare Thickener bag filter	6 pieces (1 set)
Chip bucket	Fixed chip bucket / Tilting chip bucket
Change of operation panel	Pendant type / Movable console type
3-axis manual pulse generator	Stand type / Handy type
Foundation parts	For bond anchoring method
Bond for foundation work	HILTI
Change in machine coating color	Color specified by customer
Standard tool set	Including a tool box
NC rotary table	
Electrical indexing table (Rotary table with controller)	
Touch sensor system T0	Workpiece measurement, Tool length / diameter measurement
Touch sensor system T1 (Workpiece measurement)	Workpiece measurement
Touch sensor system T1 (Tool measurement)	Tool length measurement, Tool break detection

Side View

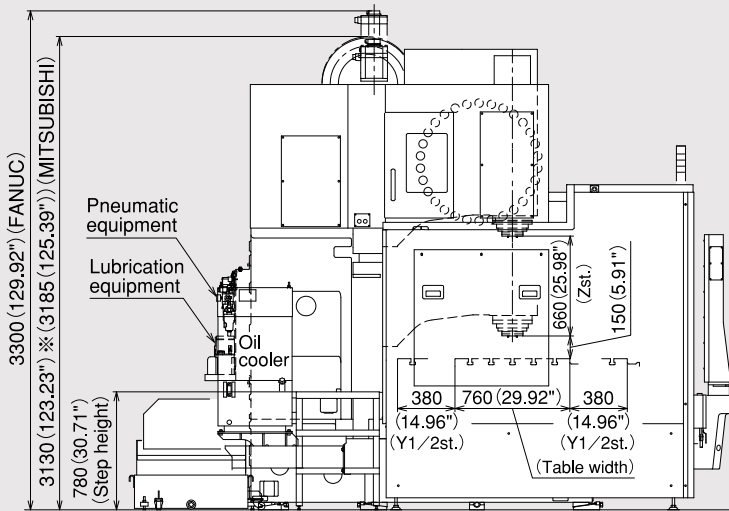

Front View

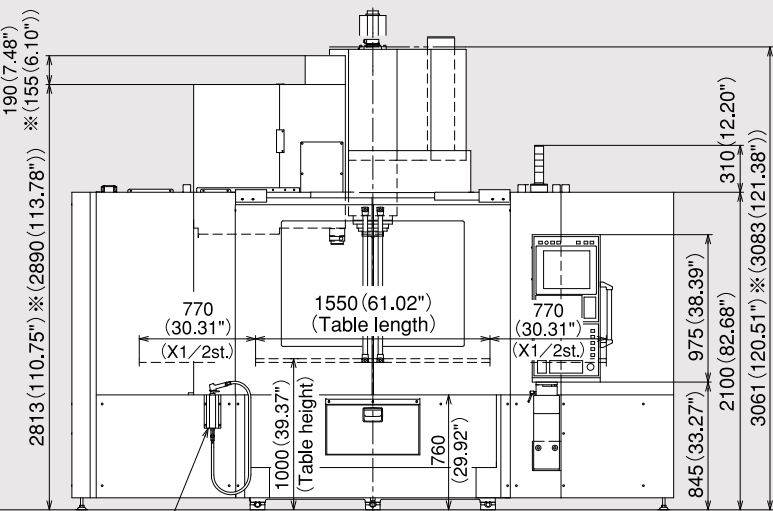

Note: Asterisked dimension changes with the machine specification.
※ : No.50

Floor Space



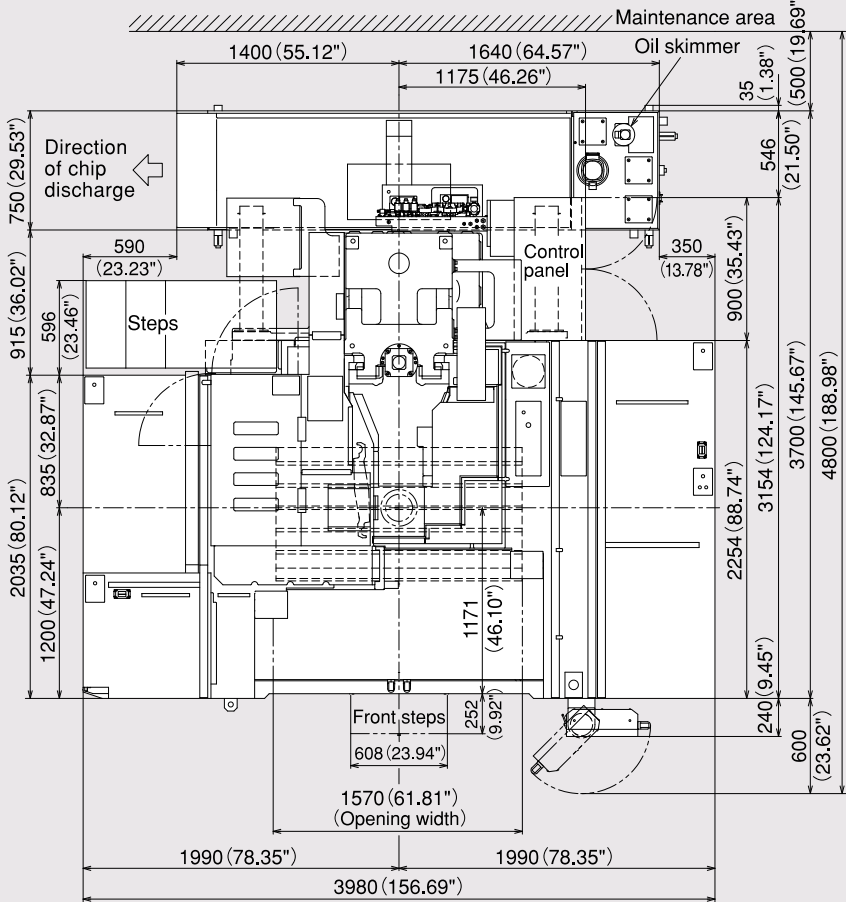


Table Dimensions

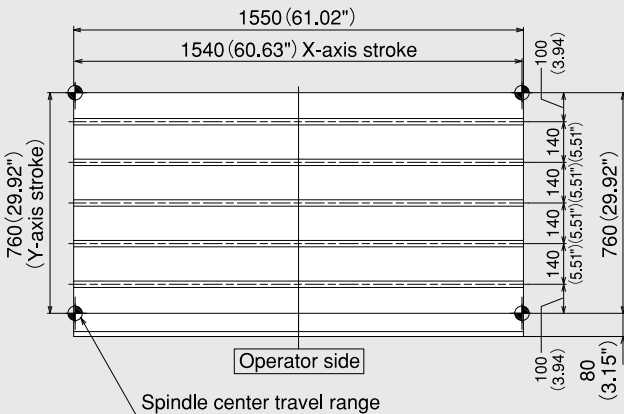

T-slot dimention



N830 (Windows 8-installed Open CNC)

Standard Specification	Automatic reference position return
No. of controlled axes: 3 axes (X, Y, Z)	2nd to 4th reference position return: G30 P2 to P4
No. of simultaneously controlled axes: 3 axes	Reference position return check: G27
Least input increment: 0.001mm / 0.0001"	Optional block skip: / n (n:1 to 9)
Max. programmable dimension:±99999.999mm / ±9999.9999"	Single block
Inch / Metric conversion: G20 / G21	Dry run
Program format: Meldas standard format (M2 / M0 format needs to be instructed separately.)	Machine lock
Decimal point input I / II	Z-axis feed cancel
Absolute / Incremental programming: G90 / G91	Miscellaneous function lock
Program code: ISO / EIA automatic discrimination	3D solid program check
Least control increment: 1nm	Graphic display check
Positioning: G00	Program number search
Linear interpolation: G01	Sequence number search
Circular interpolation: G02/G03 (Including radius designation)	Sequence number comparison and stop
Unidirectional positioning	Program restart function
Helical interpolation	Cycle start
Cutting feed rate: 5.3-digit F-code, direct designation	Feed hold
One digit F-code feed	Manual absolute (ON / OFF with PLC parameter)
Rapid traverse override: 0 / 1 / 10 / 25 / 50 / 100%	Auto restart
Cutting feed rate override: 0 to 200% (every 10%)	Program stop: M00
Feed rate override cancel: M49 / M48 (cancel)	Optional stop: M01
Rigid tap cycle: G74, G84	Machining time computation
Manual handle feed: Least input increment ×1, ×10, ×100 / graduation	Automatic operation handle interruption
Dwell: G04	Manual numerical command
Part program storage capacity: 1280m [500KB]	Sub program control: M98, M99
No. of registered programs: 1000	Canned cycle: G73, G74, G76, G81 to G89, G80 (cancel)
Part program editing	Linear angle designation
Background editing: Possible to program or edit the machining program while NC machining is executed.	Circular cutting: G12, G13
Buffer modification	Parameter mirror image
Color touch-panel display (15" LCD / QWERTY key MDI)	Programmable mirror image: G51.1, G50.1 (cancel)
Integrating time display	User macro and user macro interruption
Clock function	Variable command: total 700 sets
User definable key	Programmable coordinate system rotation: G68, G69 (cancel)
MDI (Manual Data Input) operation	Parameter coordinate system rotation
Menu list	Corner chamfering / corner R: Insert between straight line-straight line / straight line-circle blocks
Parameter / Operation guidance	Programmable data input: G10 / G11 (cancel)
Alarm guidance	Automatic corner override
Ethernet interface	Exact stop check / mode
SD card / USB memory interface	Playback
Operation inside display unit with high-speed program server	Memory pitch error compensation
Operation with SD card / USB memory	Backlash compensation
Spindle function: Direct designation of spindle speed with 5-digit S-code	Skip function: G31
Spindle speed override: 50 to 150% (every 5%)	Manual tool length measurement
Tool function: Direct designation of called tool number with 4-digit T-code	Tool life management II: 200 sets
ATC tool registration	External search
Miscellaneous function: Designation with 3-digit M-code	Emergency stop
Multiple M-codes in 1 block: Maximum 3 codes in 1 block (Maximum 20 settings)	Data protection key
Tool length offset: G43, G44, G49 (cancel)	NC alarm display
Tool position offset: G45 to G48	Machine alarm message
Cutter compensation: G38 to G42	Stored stroke limit I / II
Tool offset sets: 200 sets	Load monitor
Tool offset memory II: tool geometry (length/diameter) and wear offset	Self-diagnosis
Machine coordinate system: G53	Absolute position detection
Coordinate system setting: G92	
Automatic coordinate system setting	
Workpiece coordinate system: G54 to G59	
Local coordinate system: G52	
Manual reference position return	

Optional Specification
Additional one axis control: name of axis (A, B, C, U, V, W)
Additional two axes control: name of axis (A, B, C, U, V, W) ^{Note}
Simultaneously controlled axes: 4 axes
Simultaneously controlled axes: 5 axes ^{Note}
Least input increment: 0.0001mm / 0.00001"

Program format: M2 / M0 format
Spiral / Conical interpolation
Cylindrical interpolation
Hypothetical axis interpolation
NURBS interpolation (Hyper HQ control mode II is required)
Handle feed 3 axes: Standard pulse handle is removed
Inverse time feed
Part program storage capacity: 2560m [1Mbyte] (No.of registered programs: 1000)
Part program storage capacity: 5120m [2Mbyte] (No.of registered programs: 1000)
Color touch-panel display (19" LCD / Software key MDI)
RS232C interface: RS232C-1CH
Computer link B: RS232C
Spindle contour control (Spindle position control)
3-dimensional cutter compensation
Tool offset sets: 400 sets
Tool offset sets: 999 sets
Addition of workpiece coordinate system (total 96): G54.1 P1 to G54.1 P96
Addition of workpiece coordinate system (total 300): G54.1 P1 to G54.1 P300
Tool retract and return
Scaling: G51, G50 (cancel)
Pattern rotation
Chopping function
Special canned cycles: G34, G35, G36, G37
Additional tool life management sets: total 400 sets
Additional tool life management sets: total 999 sets

Original Nidec OKK Software			
	VM43R II	VM53R II	VM76R II
Integrated machining support system	STD	STD	STD
Tool support	STD	STD	STD
Program Editor	STD	STD	STD
EasyPRO	STD	STD	STD
Work Manager	Opt	Opt	Opt
HQ control	STD	STD	STD
Hyper HQ control mode I	Opt	Opt	Opt
Hyper HQ control mode II	Opt	Opt	Opt
Soft Scale III	STD	STD	STD
Cube environmental thermal displacement correction	STD	STD	STD
WinGMC8 (including the option H)	STD	STD	STD
Cycle Mate	Opt	Opt	Opt
Touch sensor T0 software	Opt	Opt	Opt
Soft CCM (Cutting failure monitoring)	Opt	Opt	Opt
Soft AC (Adaptive control)	Opt	Opt	Opt
Automatic restart at the time of tool breakage	Opt	Opt	Opt

STD : Standard Opt : Option

Note: The controller N850 (Windows 8-installed Open CNC) is used when five axes are controlled simultaneously.

F31i-B Plus (WindowsCE-installed Open CNC) , OKK-FANUC Ai

Standard Specification	F31i	FAi
No. of controlled axes: 3 axes (X, Y, Z)		
No. of simultaneously controlled axes: 3 axes		
Least input increment: 0.001mm / 0.0001"		
Max. programmable dimension: ±999999.999mm/±39370.0787"		
Absolute / Incremental programming: G90 / G91		
Decimal point input/Pocket calculator type decimal point input		
Inch/ Metric conversion: G20 / G21		
Program code: ISO / EIA automatic discrimination		
Program format: FANUC standard format		
FS15 tape format		—
Nano interpolation (internal)		
Positioning: G00		
Linear interpolation: G01		
Circular interpolation: G02 / G03 (CW/CCW) (Including radius designation)		
Helical interpolation		
Unidirectional positioning: G60		
Cutting feed rate: 6.3-digit F-code, direct designation		
Rapid traverse override: 0 / 1 / 10 / 25 / 50 / 100%		
Cutting feed rate override: 0 to 200%(every 10%)		
Feed rate override cancel: M49 / M48		
Rigid tapping: G84, G74 (Mode designation: M29)		
Manual handle feed:Least input increment ×1, ×10, ×100 / graduation		
Dwell: G04		
One-digit F code feed		
inverse time feed		
Part program storage capacity: total 1280m [512KB] (total 400 programs)		—
Part program storage capacity:total 10240m [4MB] (total 1000 programs)		—
Part program editing		
Background editing: Possible to program or edit the machining program while NC machining is executed.		
Extended part program editing		
10.4-inch color LCD/MDI		—
15-inch color LCD/QWERTY key MDI		—
Clock function		
MDI (manual data input) operation		
Run hour and parts count display		
Memory card/USB interface		
Spindle function: Direct designation of spindle speed with 5-digit S-code		
Spindle speed override: 50 to 150%(every 5%)		
Tool function: Direct designation of called tool number with 4-digit T-code		
ATC tool registration		
Auxiliary function: Designation with 3-digit M-code		
Multiple M-codes in 1 block: Maximum 3 codes in 1 block (Maximum 20 settings)		
Tool length offset: G43, G44 / G49		
Tool diameter and cutting edge R compensation: G41, G42 / G40		
Tool offset sets: total 400 sets		
Tool offset memory C		
Tool position offset		
Automatic reference position return: G28 / G29		
2nd reference position return: G30		
Machine coordinate system: G53		
Coordinate system setting: G92		
Automatic coordinate system setting		

Standard Specification	F31i	FAi
Workpiece coordinate system: G54 to G59 G54.1 P1 ~ P48		
Local coordinate system: G52		
Polar coordinate command: G15,G16		—
Manual reference position return		
Reference position return check: G27		
Optional block skip:/		
Single block		
Dry run		
Machine lock		
Z-axis feed cancel		
Auxiliary function lock		
Graphic function		
Program number search		
Sequence number search		
Program restart		
Cycle start		
Feed hold		
Manual absolute (ON/OFF with PMC parameter)		
Auto restart		
Program stop: M00		
Optional stop: M01		
Sequence number collation and stop		
Sub program control		
Canned cycle: G73, G74, G76, G80 to G89		
Mirror image function parameter		
Custom macro		
Interactive graphic input		—
Programmable mirror image		
Programmable data input: G10		
Automatic corner override		
Manual Guide i (Basic)		
Exact stop check / mode		
Scaling: G50, G51		
Additional custom macro common variables: 600		—
Additional custom macro common variables: 1000		—
Coordinate system rotation: G68, G69		
Optional chamfering / corner R		
Playback		—
Interpolation type pitch error compensation		
Backlash compensation for each rapid traverse and cutting feed		
Smooth backlash		—
Skip function		
Tool life management: total 128 sets		—
Tool life management: total 256 sets		—
Tool length manual measurement		
Data protection key		
NC alarm display / alarm history display		
Machine alarm display		
Stored stroke check 1		
Stored stroke check 2		
Load monitor		
Self-diagnosis		
Absolute position detection		

Optional Specification	F31i	FAi
Additional one axis control: name of axis (A, B, C, U, V, W) ^{Note1}		
Additional two axes control: name of axis (A, B, C, U, V, W) ^{Note2}		—
No. of simultaneously controlled axes: 4 axes		—
No. of simultaneously controlled axes: 5 axes ^{Note2}		—

Optional Specification	F31i	FAi
Least input increment: 0.0001mm / 0.00001"		
FS10 / F11 tape format		—
Spiral / Conical interpolation		—
Cylindrical interpolation		STD
Hypothetical axis interpolation		—
Involute interpolation		—
NURBS interpolation		—
Smooth interpolation (Hyper HQ control B mode is required)		—
Handle feed 3 axes: Standard pulse handle is removed		
Part program storage capacity: total 5120m [2MB] (400 in total)		—
Part program storage capacity: total 20480m [8MB] (1000 in total)		—
Machining time stamp		
Data server: ATA card (1GB)		
Data server: ATA card (4GB)		—
RS232C interface: RS232C-1CH		
Spindle contour control (Cs contour control)		
Tool position offset		—
Tool offset sets: total 499 sets		—
Tool offset sets: total 999 sets		—
Addition of workpiece coordinate system (total 300 sets): G54.1 P1 to P300		
Optional block skip: Total 9		STD
Manual handle interruption		STD
Tool retract and return		—
Figure copy		—
Interruption type custom macro		STD
Instruction of inclined plane indexing		—
Chopping		
Manual Guide i (Milling cycle)		
Addition of tool life management sets: total 1024 sets		—
High-speed skip		

Original Nidec OKK Software	F31i	FAi
Integrated machining support software (incl. help guidance, etc.)	STD	—
Tool support	STD	—
Program Editor	STD	—
EasyPRO	STD	—
Work Manager	Opt	—
HQ control	STD	STD
Hyper HQ control mode A	Opt	Opt
Hyper HQ control mode B	Opt	—
Hyper HQ varue kit ^{Note3}	Opt	—
Special canned cycle (including circular cutting)	Opt	Opt
Cycle Mate F	Opt	Opt
Soft Scale IIm	—	STD
Soft Scale III	STD	—
Cube environmental thermal displacement correction	STD	—
Touch sensor T0 software	Opt	Opt
Soft CCM (Tool failure detection system)	Opt	Opt
Soft AC (Adaptive control unit)	Opt	Opt
Automatic restart at tool damage	Opt	Opt

STD : Standard Opt : Option

Note 1: FAi enables indexing only.
Note 2: The controller F31i-B5 Plus(Windows CE-installed Open CNC) is used when five axes are controlled simultaneously.
Note 3: The hyper HQ value kit is accompanied by the “data server: ATA card(1GB)” and the hyper HQ control Mode B.
Note 4: The controller FAi is compatible only with VM43R II.